

specification sheet

Application : portable solar panel for electronic devices

Power : 13.5 W

Operating voltage (Vmpp) : 15 V *

Operating current (Impp) : 900 mA *

Open circuit voltage (Voc) : 23 V *

Short circuit current (Isc) : 1200 mA *

Rolled dimensions : 350 mm x Ø 80 mm

Unrolled dimensions : 350 mm x 1500 mm

Thickness : 1.2 mm

Temperature operating range : -20°C to +60°C

Weight : 1100 g

Connector : universal cigarette lighter socket (male and female)


Compatible accessories : AA and AAA battery charger, cigarette lighter adaptor (mobile phones, PDA', ...) and USB connections



CE Approval

* measured at Standard Testing Conditions (STC), 1000W/m², AM 1.5, 25°C

sunpack 3 years warranty
 solar energy for portable electronic devices

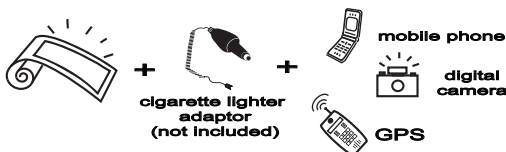

14 W 15 VDC 900 mA / battery capacity (mAh) :	600	900	1200	1500	2000
charging time in hours (measured in full sunshine)	0h40	1h00	1h20	1h40	2h15
2 x 14 W connected in parallel (15 VDC 1800mA)	0h20	0h30	0h40	0h50	1h10