


HOW TO ORDER

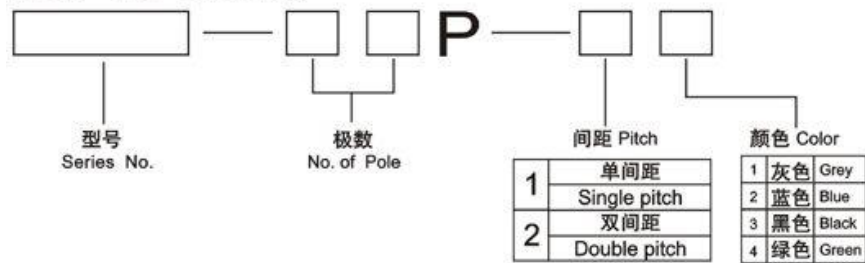

·MATERIAL

CONTACT : PHOSPHOR BRONZE
 SCREWS : M2.5 STEEL ZINC PLATED
 HOUSING : PA66, UL94V-0

·ELECTRICAL

RATED VOLTAGE : 300V
 RATED CURRENT : 12A
 CONTACT RESISTANCE : 20mΩ
 INSULATION RESISTANCE : 5000MΩ/1000V
 WITHSTANDING VOLTAGE : AC1500V/1Min
 WIRE RANGE : 28-12AWG 2.5mm²

·MECHANICAL

TEMP. RANGE : -40°C +105°C
 MAX SOLDERING : +250°C, FOR 5 SEC.
 TORQUE : 0.5Nm (4.51B.IN)
 STRUO LEBGTG : 7-8mm

