



# DTA124EE / DTC124EUA / DTA124EKA / DTA124ECA / DTA124ESA

## Transistor

### ● Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits(DTA124E□)					Unit
		E	UA	KA	CA	SA	
Supply voltage	V <sub>CC</sub>	-50					V
Input voltage	V <sub>IN</sub>	-40~+10					V
Output current	I <sub>O</sub>	-30					mA
	I <sub>O(Max)</sub>	-100					
Power dissipation	P <sub>d</sub>	150	200		300		mW
Junction temperature	T <sub>j</sub>	150					°C
Storage temperature	T <sub>stg</sub>	-55~+150					°C

### ● Packaging specifications

Package	EMT3	UMT3	SMT3	SST3	SPT
	Taping	Taping	Taping	Taping	Taping
Package type	TL	T106	T146	T116	TP
Code					
Basic ordering unit (pieces)	3000	3000	3000	3000	5000
Part No.					
DTA124EE	○	-	-	-	-
DTA124EUA	-	○	-	-	-
DTA124EKA	-	-	○	-	-
DTA124ECA	-	-	-	○	-
DTA124ESA	-	-	-	-	○

### ● Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	V <sub>I(off)</sub>	-	-	-0.5	V	V <sub>CC</sub> =-5V, I <sub>O</sub> =-100μA
	V <sub>I(on)</sub>	-3	-	-		V <sub>CC</sub> =-0.2V, I <sub>O</sub> =-5mA
Output voltage	V <sub>O(on)</sub>	-	-0.1	-0.3	V	I <sub>O</sub> /I <sub>I</sub> =-10mA/-0.5mA
Input current	I <sub>I</sub>	-	-	-0.36	mA	V <sub>I</sub> =-5V
Output current	I <sub>O(off)</sub>	-	-	-0.5	μA	V <sub>CC</sub> =-50V, V <sub>I</sub> =0V
DC current gain	G <sub>I</sub>	56	-	-	-	V <sub>CC</sub> =-5V, I <sub>O</sub> =-5mA
Input resistance	R <sub>I</sub>	15.4	22	28.6	kΩ	-
Resistance ratio	R <sub>Z</sub> /R <sub>I</sub>	0.8	1	1.2	-	-
Transition frequency	f <sub>r</sub>	-	250	-	MHz	V <sub>CE</sub> =-10V, I <sub>E</sub> =5mA, f=100MHz *

\* Transition frequency of the device

### ● Electrical characteristics curves

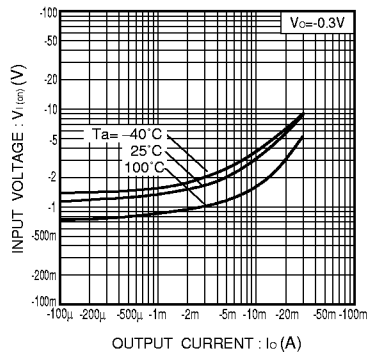


Fig.1 Input voltage vs. output current (ON characteristics)

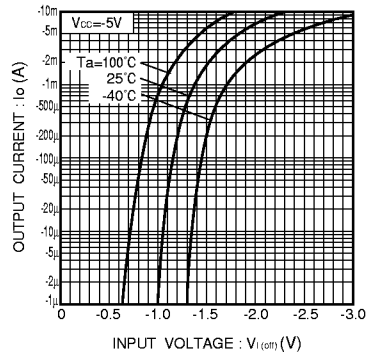


Fig.2 Output current vs. input voltage (OFF characteristics)

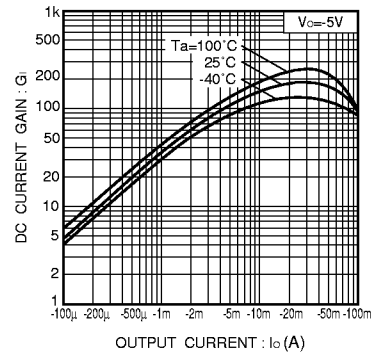


Fig.3 DC current gain vs. output current

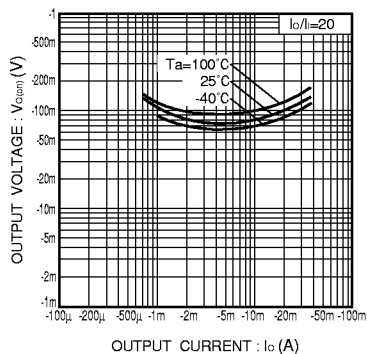


Fig.4 Output voltage vs. output current