

TBA 2800 Infrared Preamplifier

Edition April 25, 1994
6251-203-6DS

TBA 2800

Infrared Preamplifier IC

Bipolar integrated circuit, intended as a receiver preamplifier for Central Control Unit for the infrared remote-control systems designed with integrated circuits of ITT.

The TBA 2800 preamplifier IC contains four main parts: the gain-controlled amplifier I, the amplifier II, the pulse-separating amplifier III, and the inverter IV, as shown in Fig. 1. The amplifier I has a wide dynamic range and thus ensures interference-free operation, also at bright ambient light, 50-Hz-modulated light originating from fluorescent lamps, or at intensive infrared light, e. g. produced by infrared sound transmission. It is also possible, to approach almost directly the remote-control transmitter to the receiver without producing malfunction by overdriving the receiver.

The amplifier II further amplifies the signal, and amplifier III separates the pulse-shaped intelligence signal from noise and other unwanted parts. The inverter IV provided additionally inverts the output signal available at pin 7 as negative pulse, and thus delivers positive output pulses at pin 8. If an additional resistor is inserted between pin 6 and GND, the noise-immunity is increased, but the input sensitivity decreased. Pin 10 serves as test pin and must not be connected.

The capacitor connected from pin 2 to ground influences the automatic gain control of amplifier I contained in the TBA 2800. A capacitance of less than $1 \mu\text{F}$ will cause malfunction in the distance range of 0.2 m to 2 m. Fig. 3 shows the dependence of the transmission range on the capacitor at pin 2. Due to tolerances of the TBA 2800 itself, the transmitter diodes' efficiency and the receiver diode's sensitivity, the curves of Fig. 3 must be considered with a tolerance of $\pm 50\%$. The curves have been established by simulation of the distance between transmitter and receiver by means of infrared filter glass with specified attenuation inserted between transmitter and receiver.

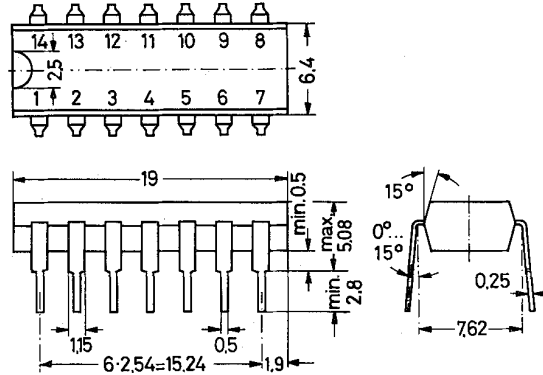


Fig. 2:
TBA 2800 in a 14-pin DIL
Plastic Package TO-116,
20 A 14 according to
DIN 41 866

Weight approx. 1.2 g
Dimensions in mm

Pin Connections

- 1 Input's Ground, 0
- 2 Capacitor Pin Amplifier I
- 3 Supply Voltage V_B
- 4 Input Amplifier III
- 5 Output Amplifier II
- 6 Pin for Adjusting the Separation Threshold
- 7 Negative Pulse Output
- 8 Positive Pulse Output
- 9 Output's Ground, 0
- 10 Test Pin, leave vacant
- 11 Input Amplifier II
- 12 Output Amplifier I
- 13 Ground, 0, of Amplifier II
- 14 Input

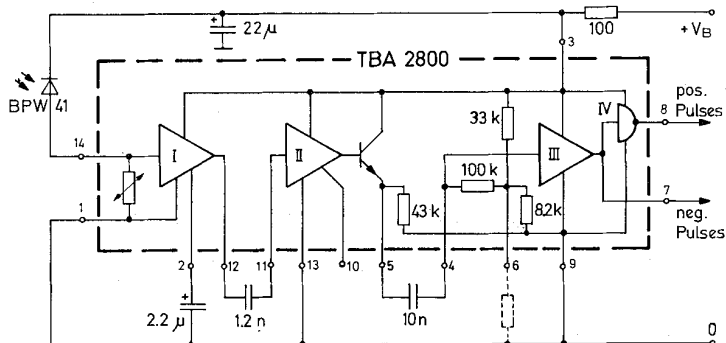


Fig. 1: TBA 2800 block diagram and application circuit

All voltages are referred to GND (pins 1, 9, and 13).

Absolute Maximum Ratings

	Symbol	Value	Unit
Supply Voltage	V_3	6	V
Ambient Operating Temperature Range	T_A	0 to +65	°C
Storage Temperature Range	T_S	-30 to +125	°C

Recommended Operating Conditions

	Symbol	Min.	Typ.	Max.	Unit
Supply Voltage	V_3	4.5	5	5.5	V

Characteristics at $V_3 = 5\text{ V}$, $T_A = 25\text{ °C}$, photo diode BPW 41, in the circuit Fig. 1

	Symbol	Min.	Typ.	Max.	Unit
Current Consumption	I_2	–	1	2	mA
Gain between pins 14 and 7	G	70	–	–	dB
Output Resistance pins 7 and 8, formed by the pull-up resistor of an NPN transistor	R_O	–	20	–	kΩ
Output Low Voltage pins 7 and 8 at $I_{OL} = 1.6\text{ mA}$	V_{OL}	–	0.4	0.8	V
IR Transmission Range using the SAA 1250 IR Transmitter IC and a Transmission Current Amplitude of 1.5 A, and one Transmitter Diode CQY 99	L1	–	12	–	m
two Transmitter Diodes CQY 99	L2	–	19	–	m
three Transmitter Diodes CQY 99	L3	–	26	–	m

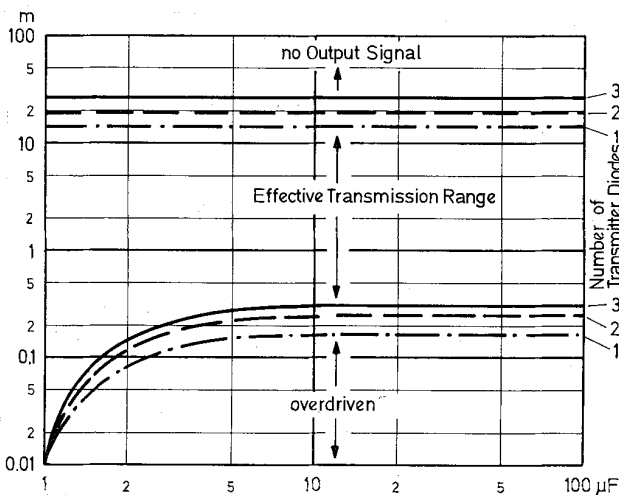


Fig. 3: Transmission range depending on capacitor at pin 2

TBA 2800

Data Sheet History

- page 3: Absolute Maximum Ratings
Ambient Operating Temperature Range (T_A) changed
from (–20 to +65°C)
to (0 to +65 °C)

MICRONAS INTERMETALL GmbH
Hans-Bunte-Strasse 19
D-79108 Freiburg (Germany)
P.O. Box 840
D-79008 Freiburg (Germany)
Tel. +49-761-517-0
Fax +49-761-517-2174
E-mail: docservice@intermetall.de
Internet: <http://www.intermetall.de>

Printed in Germany
by Simon Druck GmbH & Co., Freiburg (4/94)
Order No. 6251-203-6DS

All information and data contained in this data sheet are without any commitment, are not to be considered as an offer for conclusion of a contract nor shall they be construed as to create any liability. Any new issue of this data sheet invalidates previous issues. Product availability and delivery dates are exclusively subject to our respective order confirmation form; the same applies to orders based on development samples delivered. By this publication, MICRONAS INTERMETALL GmbH does not assume responsibility for patent infringements or other rights of third parties which may result from its use. Reprinting is generally permitted, indicating the source. However, our prior consent must be obtained in all cases.