

**NEC**

NEC Electronics Inc.

**μPD75516/P516**  
**4-Bit, Single-Chip**  
**Microcomputer With Extensive**  
**I/O and A/D Converter**

T-49-19-44

T-49-19-59

**Description**

The μPD75516 and μPD75P516 are high-performance, single-chip CMOS microcomputers that contain a CPU, ROM, RAM, I/O ports, interval timer, timer/event counter, watch timer, timer/pulse generator, an A/D converter, vectored interrupts, and a serial interface.

The instruction set allows the user to manipulate RAM data and I/O ports in 1-, 4-, and 8-bit units. The μPD75516 contains a large amount of 8-bit instructions, which enables this chip to be used in applications where previous 4-bit microcomputers could not be used.

**Features**

- Program memory (ROM): 16256 bytes
- Data memory (RAM): 512 x 4 bits
- Instruction execution times at 4.19 MHz
  - High-speed cycle: 0.95 μs
  - Lower-voltage cycles: 1.91 μs and 15.3 μs
- 136 instructions
  - Bit-manipulation instructions
  - 4-bit and 8-bit transfer, arithmetic, logical, comparison, and increment/decrement instructions
  - 1-byte relative branch instructions
  - GETI instruction that converts one 2-byte instruction or two 1-byte instructions into one 1-byte instruction
- Four register banks with eight 4-bit registers/bank
- Accumulators
  - 1-bit accumulator (CY)
  - 4-bit accumulator (A)
  - 8-bit accumulator (XA)
- 64 port lines
  - 48 I/O lines
  - 16 input-only lines
  - 28 outputs can drive a LED directly
  - 24 mask option pull-up/pull-down resistors
- Eight Input 8-bit A/D converter
- Timers
  - One 8-bit basic interval timer
  - One 8-bit timer/event counters
  - One 14-bit timer/pulse generator with PWM
  - One 14-bit watch timer
- 2-channel, 8-bit serial interface
  - SBI mode
  - 2- or 3-wire mode:
    - Data transfer can be MSB or LSB first


- Full-duplex mode
- Receive-only mode
- 16-bit sequential buffer
- Vectored interrupts
  - Two levels of nesting
  - Three external interrupts
  - Four internal interrupts
  - Nine external and one internal sources which generate interrupt requests
- Operates with oscillator or ceramic resonator
- CMOS technology at 5 V and 4.19 MHz
  - Normal operation: 3.0 mA typical
  - HALT mode: 0.6 mA typical
  - STOP mode: 0.5 μA typical
- 2.7 to 6 V operation
- Programmable versions: OTP and EPROM



**Applications**

- Home and business telephones
- Data terminals
- Industrial control
- Medical instruments
- Meters

**75X Family**

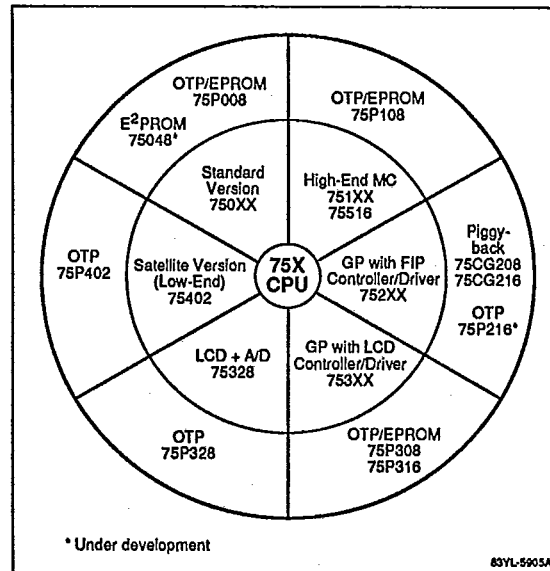

Ordering Information

Part Number	Package	ROM Type
μPD75516GF-xxx-3B9	80-pin plastic miniflat	Mask ROM
μPD75P516GF	80-pin plastic miniflat	OTP ROM
μPD75P516K	80-pin LCC	OTP ROM

Block Diagram

