


SG-4162AD

RF Signal Generator / Counter

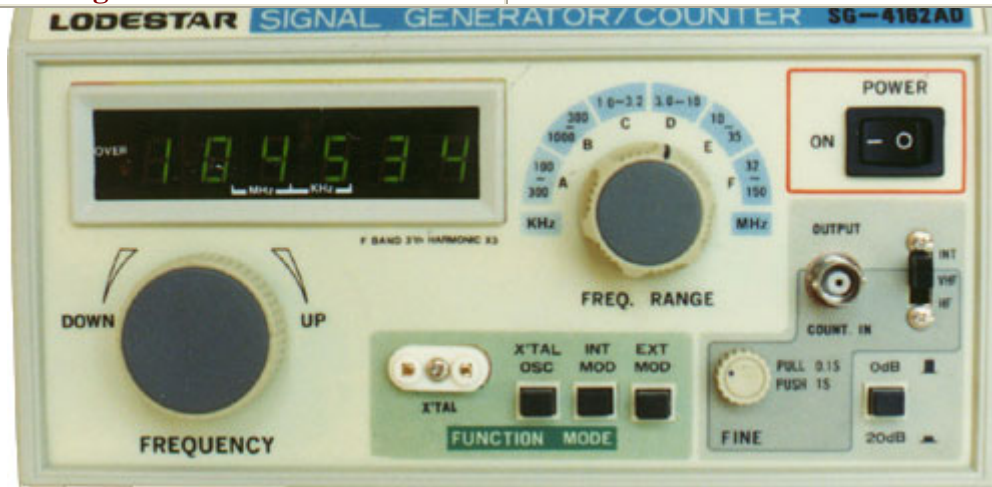

Frequency Range	100kHz-150MHz in 6 ranges (up to 450MHz on third harmonics) 100k-300k, 300k-1M, 1.0M-3.2M, 3.2M-10M, 10M-35M, 32M-150M
RF Output	100mV rms to 35MHz
Accuracy	30 ppm ? 1 digit
Output Impedance	50Ω
Modulation	Internal 1kHz AM External 50Hz - 20kHz AM
Audio Output	1kHz at 1 Vrms
FREQUENCY COUNTER	
Range	1Hz -150MHz
Resolution	1Hz or 10Hz
Display	6 digits, for internal and external signals
Gate Time	1 sec or 0.1 sec
Input Sensitivity	<50mV
Input Impedance	HF 1MΩ VHF 50Ω
Power	110V or 220V, 50 or 60Hz
Size	4.6"H X 8.5"W X 8.1"D
Weight	5.2 lbs.
Accessories	RF cable, AC power cord, manual

Service and Instruction Manual