


TIP140 TIP141 TIP142 NPN
TIP145 TIP146 TIP147 PNP

**SILICON POWER DARLINGTON
COMPLEMENTARY TRANSISTORS**



TO-218 TRANSISTOR CASE

MAXIMUM RATINGS: ($T_C=25^\circ\text{C}$)

Collector-Base Voltage
Collector-Emitter Voltage
Emitter-Base Voltage
Continuous Collector Current
Peak Collector Current
Base Current
Power Dissipation
Operating and Storage Junction Temperature
Thermal Resistance

SYMBOL	TIP140	TIP141	TIP142	UNITS
	TIP145	TIP146	TIP147	
V_{CBO}	60	80	100	V
V_{CEO}	60	80	100	V
V_{EBO}		5.0		V
I_C		10		A
I_{CM}		20		A
I_B		0.5		A
P_D		125		W
T_J, T_{stg}		-65 to +150		$^\circ\text{C}$
θ_{JC}		1.0		$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS: ($T_C=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_{CBO}	$V_{CB}=\text{Rated } V_{CBO}$			1.0	mA
I_{CEO}	$V_{CE}=\frac{1}{2} \text{ Rated } V_{CEO}$			2.0	mA
I_{EBO}	$V_{EB}=5.0\text{V}$			2.0	mA
BV_{CEO}	$I_C=30\text{mA}$ (TIP140, TIP145)	60			V
BV_{CEO}	$I_C=30\text{mA}$ (TIP141, TIP146)	80			V
BV_{CEO}	$I_C=30\text{mA}$ (TIP142, TIP147)	100			V
$V_{CE(SAT)}$	$I_C=5.0\text{A}, I_B=10\text{mA}$			2.0	V
$V_{CE(SAT)}$	$I_C=10\text{A}, I_B=40\text{mA}$			3.0	V
$V_{BE(ON)}$	$V_{CE}=4.0\text{V}, I_C=10\text{A}$			3.0	V
V_F	$I_F=10\text{A}$			2.8	V
h_{FE}	$V_{CE}=4.0\text{V}, I_C=5.0\text{A}$	1000			
h_{FE}	$V_{CE}=4.0\text{V}, I_C=10\text{A}$	500			
t_{on}	$I_C=10\text{A}, I_{B1}=I_{B2}=40\text{mA}, R_L=3.0\Omega$		0.9		μs
t_{off}	$I_C=10\text{A}, I_{B1}=I_{B2}=40\text{mA}, R_L=3.0\Omega$		4.0		μs

R2 (1-August 2008)

CentralTM

Semiconductor Corp.


DESCRIPTION:

The CENTRAL SEMICONDUCTOR TIP140, TIP145 series types are Complementary Silicon Power Darlington Transistors manufactured by the epitaxial base process, designed for general purpose amplifier and low speed switching applications where high gain is required.

MARKING: FULL PART NUMBER

**SILICON POWER DARLINGTON
COMPLEMENTARY TRANSISTORS**

TO-218 TRANSISTOR CASE - MECHANICAL OUTLINE

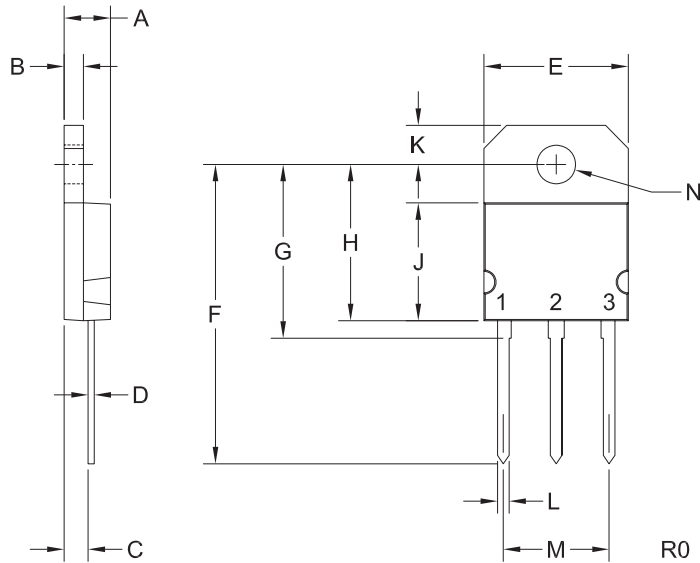

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.185	0.193	4.70	4.90
B	0.075	0.082	1.91	2.08
C	0.098		2.49	
D	0.019	0.030	0.48	0.76
E	0.578	0.598	14.68	15.19
F	1.220		30.99	
G	0.708		17.98	
H	-	0.637	-	16.18
J	-	0.480	-	12.19
K	0.155	0.163	3.94	4.14
L	0.043	0.051	1.09	1.30
M	0.425	0.437	10.80	11.10
N	0.157	0.161	3.99	4.09

TO-218 Transistor (REV: R0)

LEAD CODE:

- 1) BASE
- 2) COLLECTOR
- 3) EMITTER

Note: Tab is common to lead 2.

MARKING:

FULL PART NUMBER